



12V150AH



Features:

- ▲ Maintenance-free operation
- ▲ Compact design
- ▲ 12 years design time (at 25°C)
- ▲ Stable quality and high reliability

Applications:

- ♣ UPS
- ♣ Fire alarm and security systems
- ♣ DC power supply
- ♣ Auto control system
- ♣ Emergency lighting
- ♣ Backup power for testing and measuring instruments
- ♣ Solar panel system
- ♣ Electronic apparatus and equipment
- ♣ Communication power supply
- ♣ Alarm and security system
- ♣ Telecommunication system
- ♣ etc

Specifications:

Type	Specification
Nominal Voltage	12v(6cells)
Nominal Capacity	156ah(20hrs,25°C/77°F)
	150ah (10hrs, 25°C/77°F)
	127.5ah (5hrs, 25°C/77°F)
	90ah (1hrs, 25°C/77°F)
Dimension	Length: 551±2mm
	Width: 110±2mm
	Container Height: 288±2mm
	Total Height(with Terminal):288±3mm
Approx Weight	47KG
Terminal	T3
Container material	ABS
Max.Discharge Current	1200A(5s)
Internal Resistance	Approx 3.5mΩ
Operation Temp.Range	Discharge:-15-50°C(5-122°F)
	Charge: 0-40°C(32-104°F)
	Storage: -15-40°C(5-104°F)
Nominal Operating Temp.Range	25±3°C(77±5°F)
Cycle Use	14.4V-14.8V(25°C/77°F) Coefficient:30mv/°C (Initial charging current less than 16.5A)
Standby Use	13.5V-13.8V(25°C/77°F) Coefficient:20mv/°C (No limit on Initial Charging Current)
Capacity affected by Temp.	103% 40°C(104°F)
	100% 25°C(77°F)
	86% 0°C(32°F)

Self Discharge:

KANGLIDA batteries maybe stored for up to 6months at 25°C(77°F) and then a refreshing charge is required, for higher temperatures the time interval will be shorter.

Capacity after storage	1month	3month	6month	12month
Self-discharge 25°C(77°F)	98%	91%	82%	65%

Note: the above characteristics data are average values obtained within three charge/discharge cycles, not the minimum values.


Constant Current Discharge(Amperes at 25°C/77 °F)

F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	10h	20h
1.80V/cell	279	228	142	109	88.9	51.9	39.0	26.8	15.6	8.11
1.70V/cell	328	267	153	117	94.4	54.9	40.9	27.8	15.9	8.35
1.60V/cell	367	295	168	126	101.4	58.0	42.7	28.9	16.2	8.58







Constant Power Discharge(Watts per cell at 25°C/77 °F)

F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	10h	20h
1.80V/cell	512	432	267	207	173.2	100.0	75.7	53.0	31.2	16.05
1.70V/cell	577	477	287	223	179.6	105.1	78.8	54.4	31.7	16.47
1.60V/cell	629	516	312	236	191.3	109.5	81.7	55.8	32.0	16.88

Dimensions:

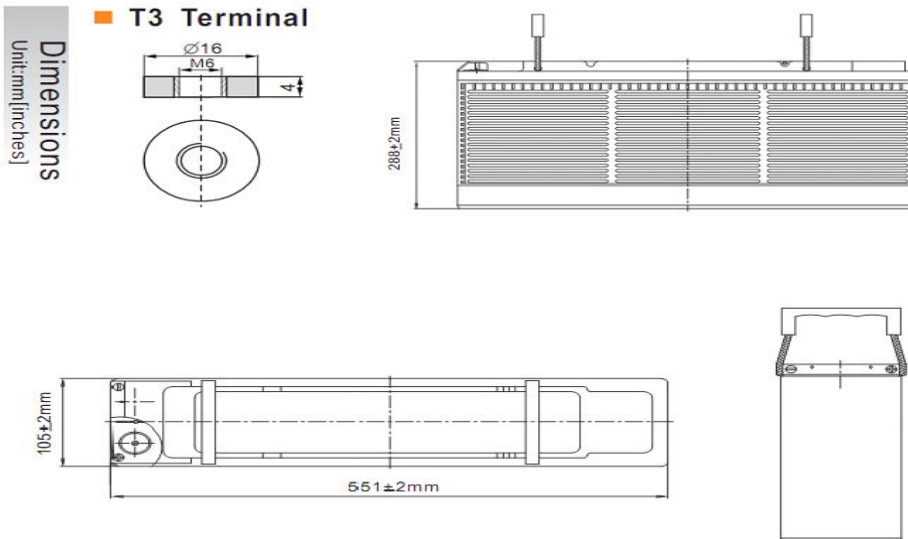

Characteristics:

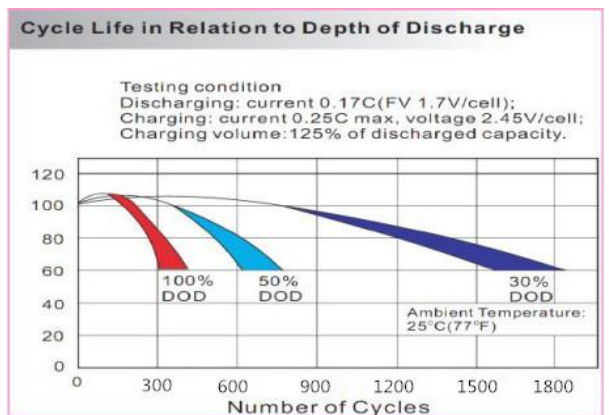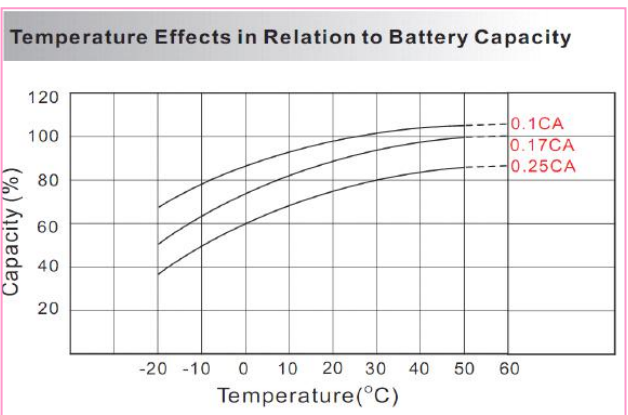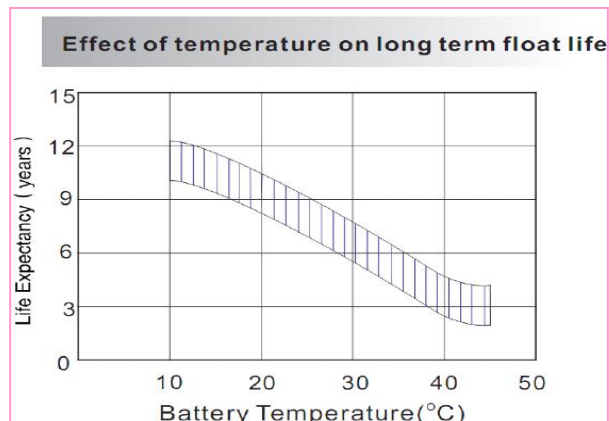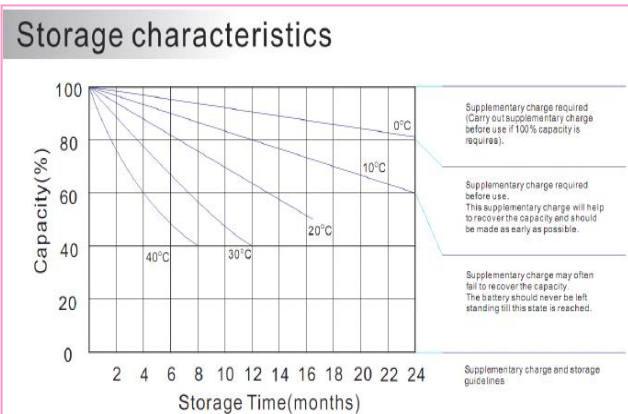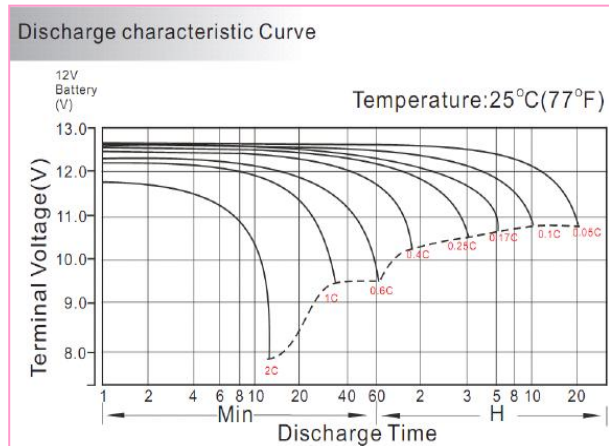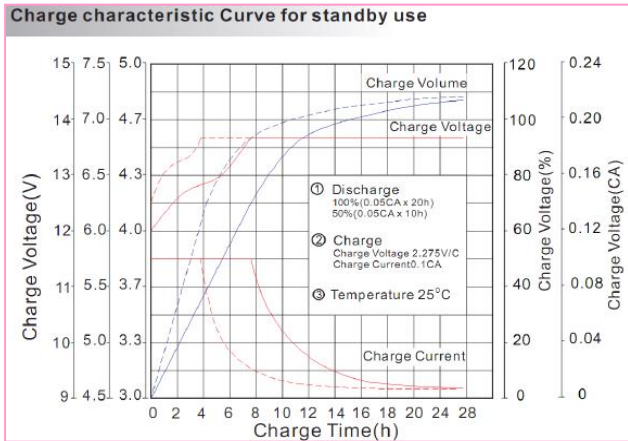

Attentions:

1. After received product, please checked box damaged or not, if find crack on battery body, contact with us and logistics, it should be caused by boorish handle during delivery;
2. Don't pull or shake terminal, otherwise, it may cause terminal loosen;
3. Battery is not allowed close to Tepid source or basked under the sun for a long time;
4. Charge in the obturate container is not allowed;
5. No short circuit. Battery should be stored full of electronic when not in need, and the battery should be charged every three months in order to avoid the irreversible sulphation. When battery case bursts or electrolyte leaks, battery should be changed lest the acid corrosion.
6. No battery in environment with the acid gas.
7. When battery is used as the backup battery, be careful and check it at regular time to avoid the damage battery. Especially the battery beyond one year should be checked in time, and change the less capacity and scrapped battery. (some batteries maybe have voltage but no current; some Batteries maybe have current but no voltage; some maybe have both but less capacity; all these conditions cannot meet the work, reach the power-on time. Do not forth small battery, cause the huge losses)
8. Forbidden put battery in the fire, otherwise it will cause an explosion.
9. When battery cracks or leaks, please use cotton cloth clean it. When skin contacts to the liquid, wash with fresh water immediately. See doctor if serious.
10. No wash on the surface of the battery with the organic solution.

KANGLIDA INTERNATIONAL HOLDING GROUP CO., LTD
Zhengzhou Kanglida electronic power Co., LTD
www.klddzdy.com